

GIB-Tone[®]

Suspended Ceiling Tiles



Features and Benefits

- Excellent light reflectance
- Rigid dimensional tolerances
- Compatible with conventional grid systems
- Quick and easy to install
- Low maintenance
- GIB-Tone[®] Vinyl, GIB-Tone[®] Pure, and GIB-Tone[®] Colour tiles clean easily. Handling marks simply wash off with a damp cloth
- Vinyl surface tiles resist fading and mould growth



GIB-Tone® Suspended Ceiling Tiles

GIB-Tone® suspended ceiling tiles now encompass a wider choice than ever. From the popular GIB-Tone® plain and vinyl-faced tiles, through to the Climate™ coated range with their exciting colour collection - designed to create dramatic ceiling spaces and enhance even the most prestigious interior environments.

Get the creative edge with the GIB® range of suspended ceiling tiles. Developed with the designer in mind, GIB-Tone® suspended ceiling tiles add flexibility and flair - offering the potential to inspire architects and satisfy modern design solutions.

Whether your needs are form or function, you'll add aesthetic value and increase the visual effect of your design.

Product Description

- GIB-Tone® suspended ceiling tiles are manufactured from square edged, 10mm and 13mm GIB® Plasterboard.
- A modified gypsum plaster core gives improved stability for the 10mm tile.


Applications

GIB-Tone® suspended ceiling tiles are designed to suit a wide range of suspended ceiling grid systems in a variety of applications:

- Retail Shops
- Supermarkets
- Commercial Offices
- Hospitals
- Cinemas
- Night Clubs

Physical Data

Tile Dimensions	1200 x 600mm nominal
Size Tolerances	+/- 2mm
Maximum weight	10mm = 7.2 kg/m ² 13mm = 9.2 kg/m ²
Edge Detail	Square Cut (Lay in)
Humidified sag	max. 5mm Test method A, Appendix G, of AS/NZS 2588

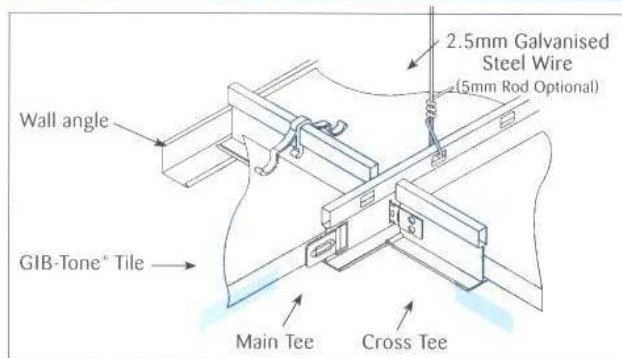

Installation

GIB-Tone® tiles must be installed in accordance with the suspended grid manufacturers instructions. Winstone Wallboards recommends that tile installers ensure that hands are clean or gloves are used to prevent the marking of GIB-Tone® suspended ceiling tile surfaces.

Early Fire Indices

As per BRANZ Test dated 18 December 1998, GIB-Tone® Plain and GIB-Tone® Vinyl tiles conform to AS1530.3: 1989.

Results	Index
Ignitability	0
Spread of Flame	0
Heat Evolved	0
Smoke Developed	5

Storage and Handling


- GIB-Tone® suspended ceiling tiles must be delivered to the site immediately prior to installation to reduce the risk of damage.
- They must be stored in flat stacks (clear of the floor) with care taken to avoid sagging or damage to ends, edges and surfaces.
- Tiles must be kept dry at all times and fully protected from the weather and direct sunlight.

Limitations

GIB-Tone® suspended ceiling tiles are unsuitable for use in areas subject to continuously damp or humid conditions.


GIB-Tone[®] Plain

Paper faced GIB[®] plasterboard tiles.

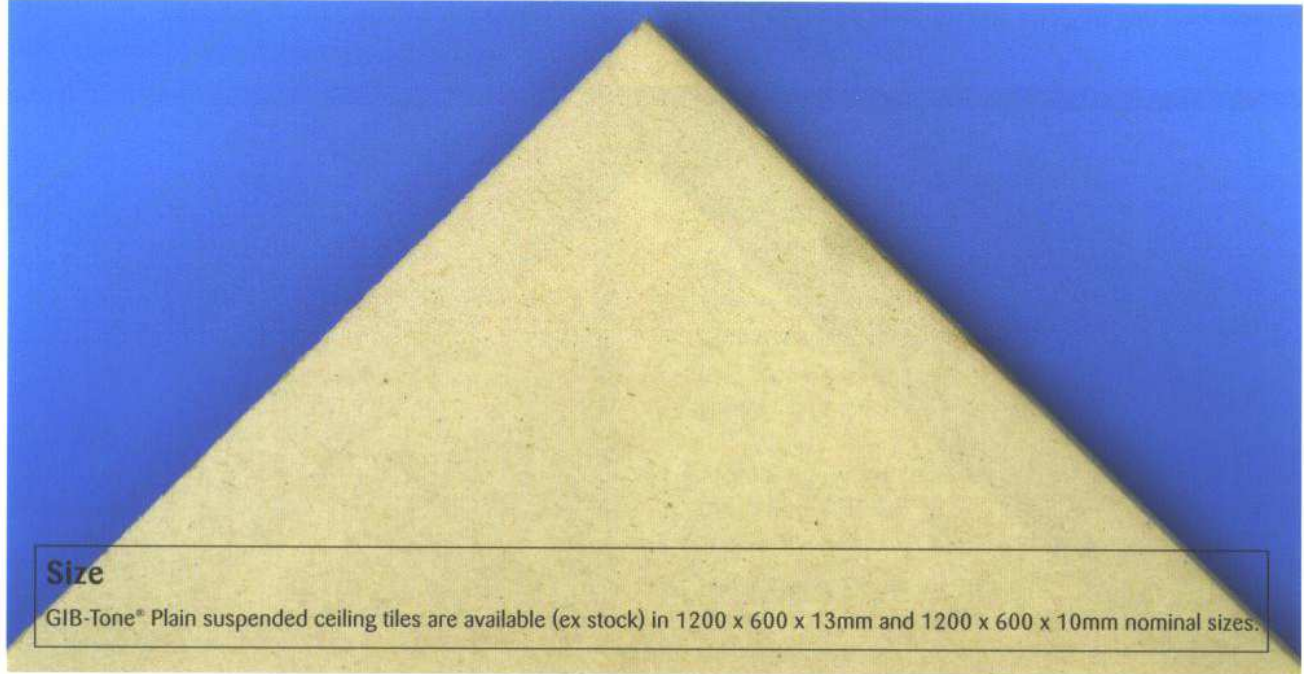


GIB-Tone[®] Vinyl

GIB-Tone[®] Vinyl is an easy-maintenance white vinyl faced GIB[®] plasterboard tile. Its wipe-clean, long wearing surface makes it ideal for food preparation and other hygiene areas.

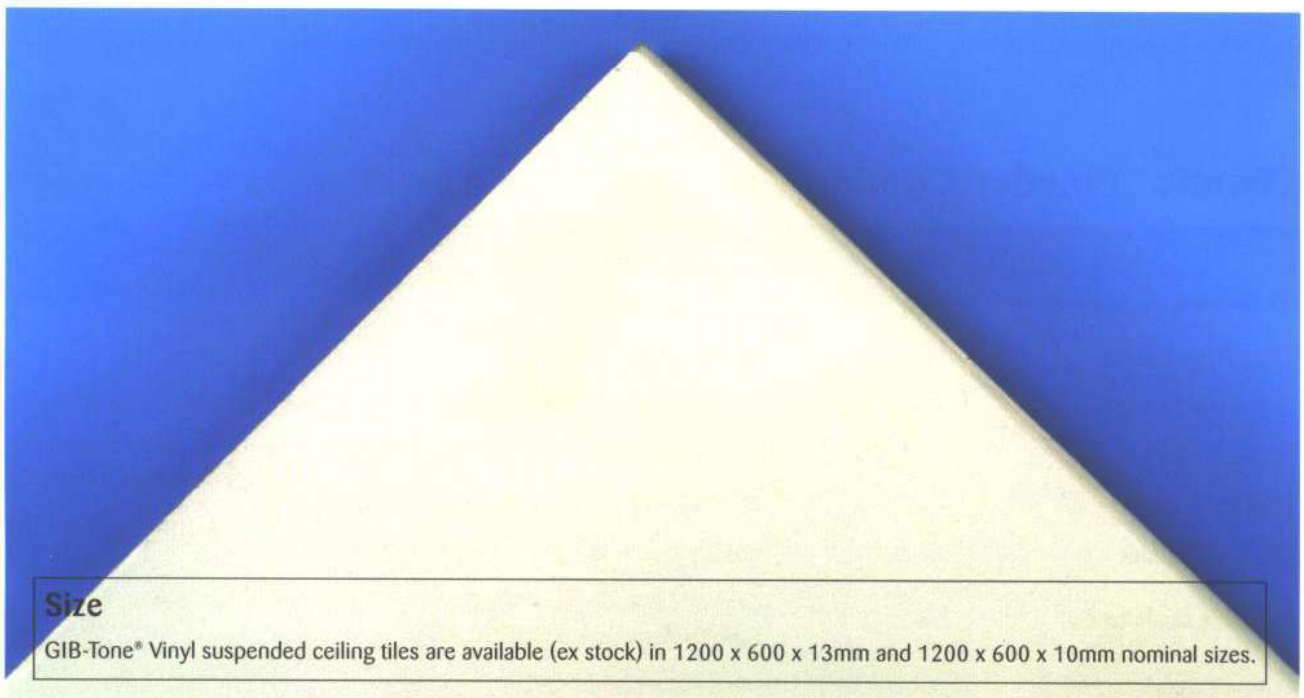

GIB-Tone® Pure

The GIB-Tone® Pure tiles are manufactured from square edged 10mm GIB® plasterboard with a modified gypsum plaster core. The GIB-Tone® Pure tile is then coated with Climate™ Coatings advanced powder coating technology to meet exacting hygiene and durability standards as required by the health and building regulations.

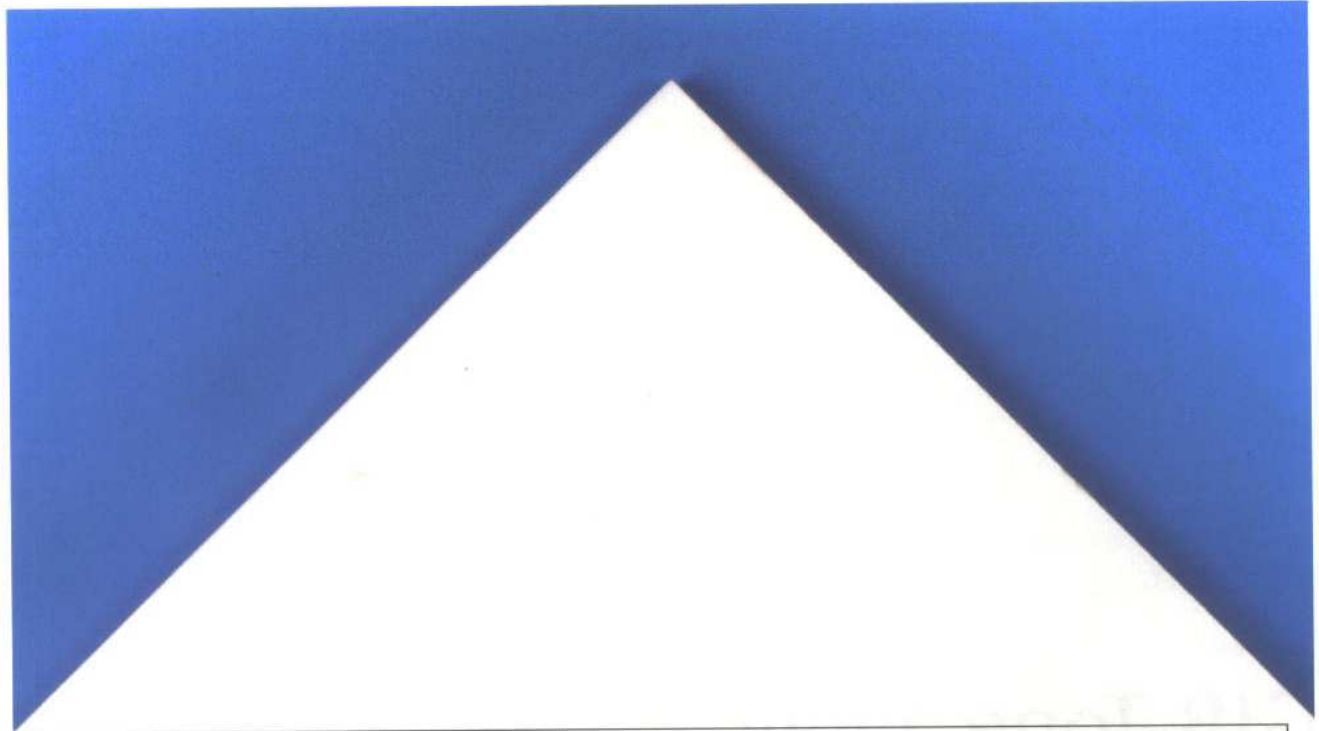

Finish

The GIB-Tone® Pure tile is available in a crisp white finish.

Size

GIB-Tone® Pure suspended ceiling tiles are available (ex stock) in 1200 x 600 x 10mm nominal size. GIB-Tone® Pure suspended ceiling tiles are also available coated both sides and made to order. Minimum order quantity of 250 tiles applies. Allow 10 working days lead time.

Climate™ Powder Coating



Features	Benefits
Excellent Surface Hardness	Long term durability
Pencil Hardness	Minimum H
Chemical Resistant	Household cleaning chemicals will not damage surface finish
Stain Resistant	No yellowing of surface coating
Water Resistant	Coating unaffected by water after 96 hours
Steam Resistant	Coating unaffected by steam after 24 hour test
Hygiene Compliant	Complies with Clause G3/AS1 of the NZBC and Clause 4 of the Food Hygiene regulations 1974
Gloss Level	Gloss (minimum 60% @ 60°)



Applications

GIB-Tone® Pure suspended ceiling tiles have been designed by Winstone Wallboards to suit a variety of suspended ceiling applications.

- Hygiene Applications
- Clinics
- Cafeterias
- Supermarkets
- Shower Rooms
- Commercial Offices
- Heavy Duty Commercial
- Terminals, etc...
- Hospitals
- Food Kitchens
- Restaurants
- Changing Rooms
- Retail Shops
- Schools
- Amenity Areas

Installation

GIB-Tone® Pure suspended ceiling tiles must be installed in accordance with the suspended grid manufacturers instructions. Winstone Wallboards recommends that tile installers ensure that hands are clean or gloves are used to prevent the marking of GIB-Tone® Pure suspended ceiling tile surfaces.

Early Fire Indices

As per Applied Physics Laboratory test 11 August 2004, conforming to AS 1530.3: 1999.

Results	Index
Ignitability	0
Spread of Flame	0
Heat Evolved	0
Smoke Developed	3

Compliance

GIB-Tone® Pure suspended ceiling tiles have been tested and assessed by BRANZ and Southern Monitoring Services. Reports and the opinions undertaken against the requirements of the NZBC Acceptable Solution G3/AS1 and the Food Hygiene Regulations 1974 are available on request from Winstone Wallboards and GIB-Tone® Pure suspended ceiling tile distributors.

Sealing Cut Edges

Cut edges must be sealed by applying a suitable waterproof, self adhesive tape to the edges.

The tape must be a minimum of 30mm wide and wrap to both front and back faces of the tile by at least 10mm to ensure a good seal is achieved at each end. Take care to ensure that the tape does not show beyond the width of the perimeter ceiling channel, or the face of an exposed grid or any fixture.

An ideal tape for this purpose is Scotch branded, Transparent Duct Tape, or similar.

Non Critical Areas

Sealing can be accomplished quickly by using an acrylic wallboard sealer.

Care and Maintenance


To maintain the functional nature of this finish, wash the tile face regularly with a dilute solution of warm water and liquid detergent, followed by a fresh water rinse.

NB: Do not allow water onto the back face of the tile.

Do not use abrasive cleaners or active organic solvents on the coating surface.

GIB-Tone® Colour

The GIB-Tone® Colour suspended ceiling tiles are manufactured from square edged 10mm GIB® plasterboard with a modified gypsum plaster core. The GIB-Tone® Colour suspended ceiling tile is then coloured to match selected Resene fashion colours in Climate™ powder coating technology. The perfect way to compliment your room scheme, and create visual harmony.

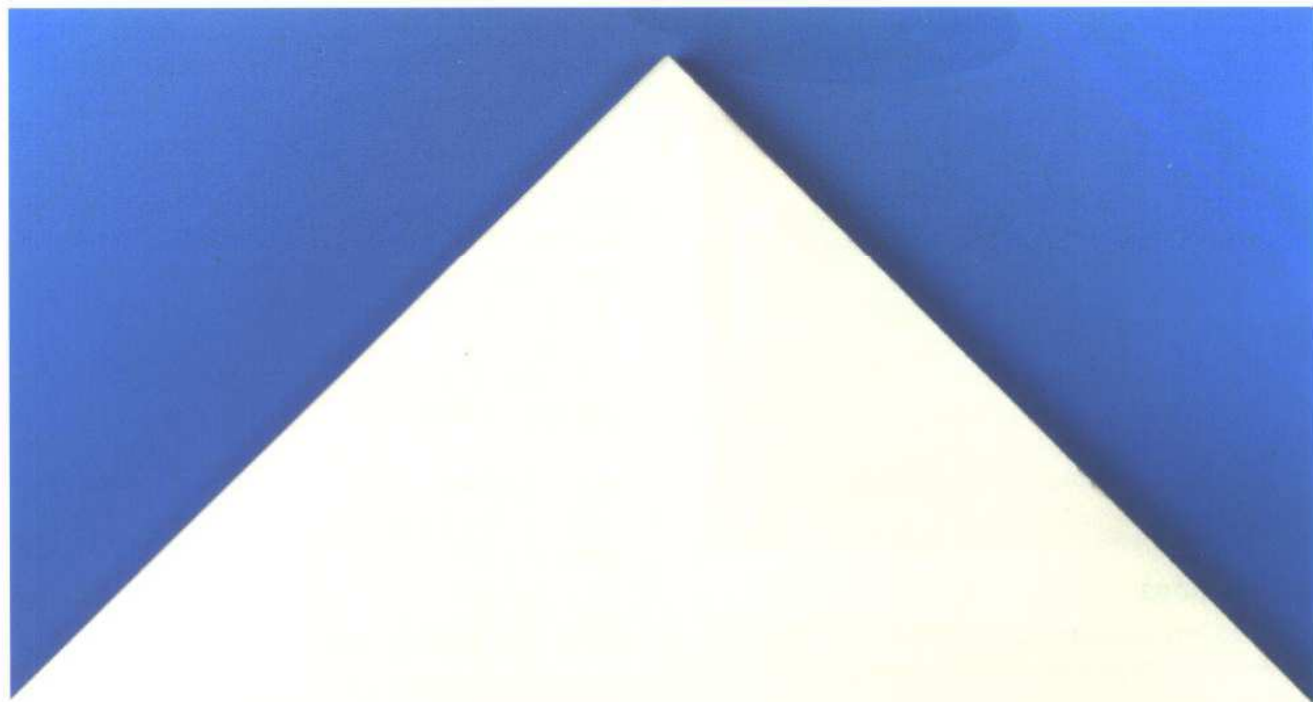

Finish

The GIB-Tone® Colour tile is available in a range of selected Resene fashion colours and black (See enclosed colour selection chart).

Size

GIB-Tone® Colour suspended ceiling tiles are available in 1200 x 600 x 10mm nominal size. Minimum order quantity of 250 tiles per colour applies. Allow 10 working days lead time.

Climate™ Powder Coating



Features	Benefits
Excellent Surface Hardness	Long term durability
Pencil Hardness	Minimum H
Chemical Resistant	Household cleaning chemicals will not damage surface finish
Stain Resistant	No yellowing of surface coating
Water Resistant	Coating unaffected by water after 96 hours
Steam Resistant	Coating unaffected by steam after 24 hour test
Gloss Level	Flat (5% ± 2.5% @ 85°)

Applications

GIB-Tone® Colour suspended ceiling tiles have been designed and selected by Winstone Wallboards to suit a variety of suspended ceiling applications.

- Cafeterias
- Entertainment Venues
- Theatres
- Commercial Offices
- Heavy Duty Commercial
- Terminals
- Restaurants
- Night Clubs
- Retail Shops
- Schools
- Amenity Areas
- Commercial Building Foyers etc.

Installation

GIB-Tone® Colour suspended ceiling tiles must be installed in accordance with the suspended grid manufacturers instructions. Winstone Wallboards recommends that tile installers ensure that hands are clean or gloves are used to prevent the marking of GIB-Tone® suspended ceiling tile surfaces when installing tiles.

Early Fire Indices

As per Applied Physics Laboratory test 7 November 2004, conforming to AS 1530.3: 1999.

Results	Index
Ignitability	0
Spread of Flame	0
Heat Evolved	0
Smoke Developed	3

NB: GIB-Tone® Colour suspended ceiling tiles are also available in black. Refer to Winstone Wallboards for a separate fire index for black.

Compliance

GIB-Tone® Colour suspended ceiling tiles have been tested and assessed by BRANZ and Southern Monitoring Services. Reports and the opinions undertaken against the requirements of the NZBC Acceptable Solution G3/AS1 and the Food Hygiene Regulations 1974 are available on request from Winstone Wallboards and GIB-Tone® suspended ceiling tile distributors.

Sealing Cut Edges

Cut edges must be sealed by applying a suitable waterproof, self adhesive tape to the edges.

The tape must be a minimum of 30mm wide and wrap to both front and back faces of the tile by at least 10mm to ensure a good seal is achieved at each end. Take care to ensure that the tape does not show beyond the width of the perimeter ceiling channel, or the face of an exposed grid or any fixture.

An ideal tape for this purpose is Scotch branded, Transparent Duct Tape, or similar.

Non Critical Areas

Sealing can be accomplished quickly when using an acrylic wallboard sealer.

Care and Maintenance


To maintain the functional nature of this finish, wash the tile face regularly with a dilute solution of warm water and liquid detergent, followed by a fresh water rinse.

NB: Do not allow water onto the back face of the tile.

Do not use abrasive cleaners or active organic solvents on the coating surface.

GIB-Tone® Colour

Suspended Ceiling Tiles

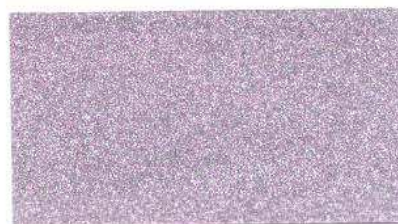

Resene Silver Aluminium 11MA50

Resene Quarter Tea 7BO35

Resene Quarter Spanish White 10YO25

Resene Quarter Pearl Lusta 10YO22

