

www.tris.co.nz 0800 666 556 info@tris.co.nz










uation







Fire Test- Group 1S

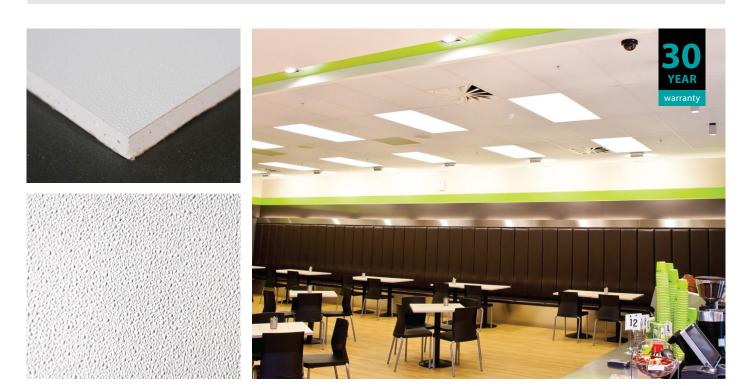

## **PRODUCT SUMMARY**

The Phonic Gypsum Vinyl ceiling tile is a versatile, cost effective product that lends itself to a range of suspended ceiling applications. The tiles are supplied in a standard white finish, in a nominal size of 1200x600x9mm.

- Due to the durable and washable finish of the Vinyl Foil tiles they are highly suitable for a multitude of commercial and hygiene applications such as Retail, Fast Food Outlets, Medical and Sports Facilities.
- The moderately embossed facing gives a crisp clean monolithic look which ensures excellent light reflectance.
- Foil backing balances the tile, enhancing its dimensional tolerance whilst increasing thermal properties.
- Tiles should be installed in accordance with the grid manufacturers instructions.









GENERAL TEST DESCRIPTION	RESULT	<b>TEST METHOD</b>
Absorbtion (ISO 354)	NRC 0.10	ASTM C432
Attenuation (predicted)	CAC < 41	
Light Reflectance	LR 80% +	
Density	790kg/m <sup>3</sup>	
Weight	7.1kg/m <sup>2</sup>	
Fire Test - ISO 5660 Parts 1&2	Group 1-S	BRANZ Cone Calorimeter
	2013 Fire Test	NZBC C/AS1-AS27
Size	9mm Depth Square Edge [1200x600] [600x600]	
	To suit 15 or 24mm grid patterns. Other sizes available on request.	
Colour	White	
Edge Detail		